

# HyperBar-UL2 - HyperBar BEC

## FEATURES:

Handlebar Clamp Diameter: 1.25" (31.8mm).  
Bend Angle: 6°+6°.  
Rise: +/-5mm.  
**HyperBar:** NOT Compatible with bar extension.  
**HyperBar BEC:** Compatible with bar extension.  
Destination: Cross Country only, not for Downhill.

## REINFORCED END PLUGS ON HYPERBAR BEC:

- Hyperbar BEC feature glued in aluminium reinforcements that shouldn't be removed.
- Reinforcements are necessary to handle bar-end clamp forces.
- On request we can supply shorter bar custom cut to desired length.

## INSTALLATION:

- **Always respect max tightening torque.**

**Stem Max tightening torque  
M4/4Nm - M5/6Nm**

- Handlebar must be mounted centrally on a stem with rounded clamp edges and a clamp bar diameter of 1.25" (31.8mm).

## Levers/shifters max torque


**1.5Nm M3 bolts  
2.0Nm M4 bolts  
2.5Nm M5 bolts**

This torque should keep levers firm in all riding conditions and still enable them to slightly rotate on handlebar in case of crash.

## WARNINGS:

- Maximum rider weight: 90 kg / 200 lbs.
- **Avoid any sharp edge** on the inner clamp surface of shifters - levers - stem and of any other accessory. Smoothly round the edges if necessary.
- Note that international safety standards requires that handlebar+stem combination is always made by same manufacturer.
- To avoid injury do not modify in any way bar and stem parts, surfaces and materials.
- Surface damages and scratches can compromise carbon fiber structural strength.
- Replace immediately the bar and the stem after accident, violent shock or in case of any damage on their surface.

## +/- 5mm reversible rise setup

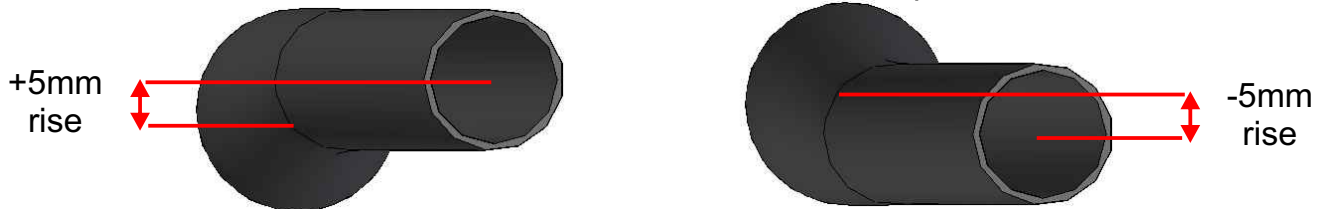

Studio Riva S.r.l. - Tel: ++39 0371 203059  
info@extralite.com - www.extralite.com



## Extralite Limited Warranty

Extralite products are warranted against defects in materials and/or workmanship for a period of two years from original date of purchase to the original owner only.

Any Extralite product that is returned and found by Studio Riva to be defective in materials and/or workmanship will be repaired or replaced at the sole discretion of Studio Riva. This warranty is the sole and exclusive remedy. Studio Riva shall not be held liable for any indirect, special or consequential damages.

The warranty is expressly limited to repair or replacement of the product that has been returned and found to be defective by Studio Riva and are the sole remedy of the warranty. No credits or refunds will be issued.

The warranty does not cover: normal wear, tear and fatigue; damage or failure due to accident or collision. Improper assembling, poor maintenance, alterations or modifications, installation of parts not compatible with Extralite products void this warranty.

Warranty does not cover damage arising from crash, abuse and/or misuse or any other circumstances in which the product had been subjected to forces or loads beyond its design.

Immediately replace the component after crash and violent shock, or after continuous heavy use.  
Improper use, modification and/or part changing, including surface finishing, could irreparably damage the component.  
All labor charges for warranty service are responsibility of the product owner.

### INSTALLATION WARNING:

Extralite components are extremely performing and lightweight, crafted with very high quality, they request adequate installation and maintenance care.

We strongly recommended that a professional bike shop install and service your Extralite components.

Improper assembly and/or adjustment may significantly compromise strength and durability of the component causing serious personal injury. Carefully check proper tightening torque of every bolt. Always respect installation recommendations.

Extralite components are designed for a specific use

X-Country or Road or Downhill, respect product specific destination.

Note: the rider assumes all the risks regarding use and installation of Extralite components.



## Extralite Limited Warranty

Extralite products are warranted against defects in materials and/or workmanship for a period of two years from original date of purchase to the original owner only.

Any Extralite product that is returned and found by Studio Riva to be defective in materials and/or workmanship will be repaired or replaced at the sole discretion of Studio Riva. This warranty is the sole and exclusive remedy. Studio Riva shall not be held liable for any indirect, special or consequential damages.

The warranty is expressly limited to repair or replacement of the product that has been returned and found to be defective by Studio Riva and are the sole remedy of the warranty. No credits or refunds will be issued.

The warranty does not cover: normal wear, tear and fatigue; damage or failure due to accident or collision. Improper assembling, poor maintenance, alterations or modifications, installation of parts not compatible with Extralite products void this warranty.

Warranty does not cover damage arising from crash, abuse and/or misuse or any other circumstances in which the product had been subjected to forces or loads beyond its design.

Immediately replace the component after crash and violent shock, or after continuous heavy use.  
Improper use, modification and/or part changing, including surface finishing, could irreparably damage the component.  
All labor charges for warranty service are responsibility of the product owner.

### INSTALLATION WARNING:

Extralite components are extremely performing and lightweight, crafted with very high quality, they request adequate installation and maintenance care.

We strongly recommended that a professional bike shop install and service your Extralite components.  
Improper assembly and/or adjustment may significantly compromise strength and durability of the component causing serious personal injury.  
Carefully check proper tightening torque of every bolt. Always respect installation recommendations.

Extralite components are designed for a specific use

X-Country or Road or Downhill, respect product specific destination.

Note: the rider assumes all the risks regarding use and installation of Extralite components.

# EXTRALITE

## HyperBar-UL2 - HyperBar BEC

### FEATURES:

Handlebar Clamp Diameter: 1.25" (31.8mm).

Bend Angle: 6°+6°.

Rise: +/-5mm.

**HyperBar:** NOT Compatible with bar extension.

**HyperBar BEC:** Compatible with bar extension.

Destination: Cross Country only, not for Downhill.

### REINFORCED END PLUGS ON HYPERBAR BEC:

- Hyperbar BEC feature glued in aluminium reinforcements that shouldn't be removed.

- Reinforcements are necessary to handle bar-end clamp forces.

- On request we can supply shorter bar custom cut to desired length.

### INSTALLATION:

- **Always respect max tightening torque.**

Stem Max tightening torque  
M4/4Nm - M5/6Nm

### Levers/shifters max torque

1.5Nm M3 bolts

2.0Nm M4 bolts

2.5Nm M5 bolts

This torque should keep levers firm in all riding conditions and still enable them to slightly rotate on handlebar in case of crash.

- Handlebar must be mounted centrally on a stem with rounded clamp edges and a clamp bar diameter of 1.25" (31.8mm).

### WARNINGS:

- Maximum rider weight: 90 kg / 200 lbs.

- **Avoid any sharp edge** on the inner clamp surface of shifters - levers - stem and of any other accessory.  
Smoothly round the edges if necessary.

- Note that international safety standards requires that handlebar+stem combination is always made by same manufacturer.


- To avoid injury do not modify in any way bar and stem parts, surfaces and materials.

- Surface damages and scratches can compromise carbon fiber structural strength.

- Replace immediately the bar and the stem after accident, violent shock or in case of any damage on their surface.

+/- 5mm reversible rise setup

+5mm  
rise

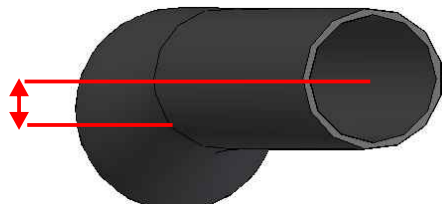

-5mm  
rise

