


DESTINATION

X-Country, Enduro.

GUIDELINE

Never use high-pressure spray washing directly onto the hub. Clean hubs externally with warm water and soap. Periodically clean hub internals (every 6-12 months in normal and dry conditions, every 3 months in wet conditions and always before leaving the wheel unused for more than 1 month) see disassembling instructions.

Warning: Water and moisture stagnant inside hub can permanently damage bearings.

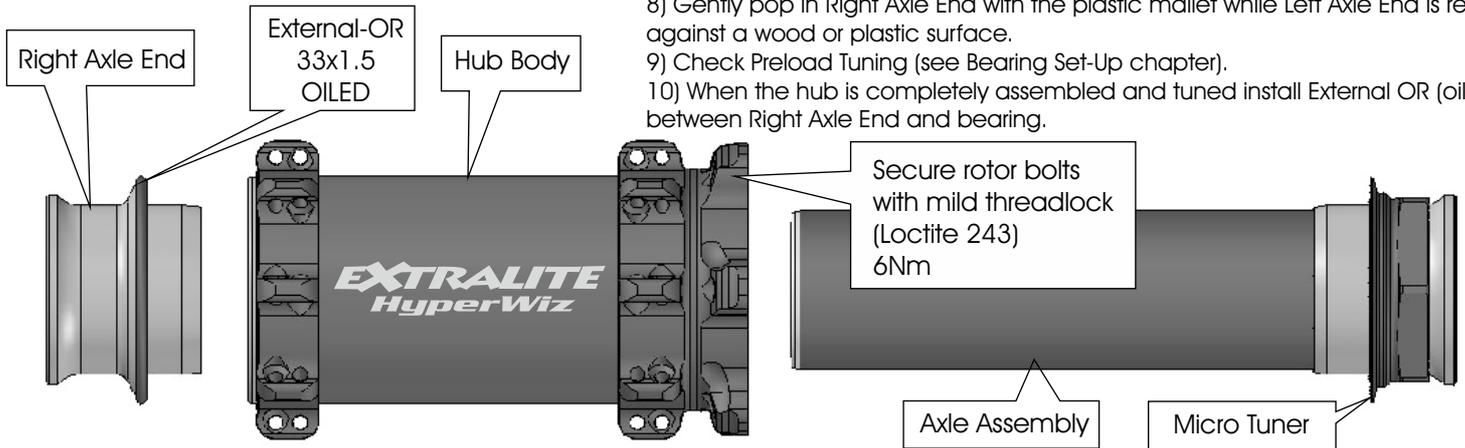

BEARING PRELOAD SET-UP:

Optimal bearing preload is important for a long bearing life. Micro Tuner comes pre-adjusted from the factory. Do not modify its position if not necessary.

Checking

Before modifying bearing preload carefully check the complete wheel as follows:

- 1) Install wheel into dropouts and normally lock skewer.
- 2) Check there is no play at rim diameter.
- 3) Leave wheel free to completely stop spinning and carefully control latest instants of movement. Stopping should be very smooth.

HYPERWIZ DISASSEMBLING

Clean hubs externally with warm water and soap. Never use high-pressure spray washing directly on bearings.

- 1) Pull Right Axle End with External OR and remove it, you can gently push with a plastic rod inserted from central hole of Left Axle End.
- 2) Extract Axle Assembly by pushing it from right side, gently push with a plastic mallet.
- 3) Clean hub internals and all parts (Do not use aggressive solvents).
- 4) Apply grease on Axle bearing contact areas.
- 5) Fill up Micro Tuner internal face with soft grease.
- 6) Insert Axle Assembly from Left side, gently push it in with using the small plastic mallet.
- 7) Fill up Right Axle End internal face with soft grease.
- 8) Gently pop in Right Axle End with the plastic mallet while Left Axle End is rested against a wood or plastic surface.
- 9) Check Preload Tuning (see Bearing Set-Up chapter).
- 10) When the hub is completely assembled and tuned install External OR (oiled) between Right Axle End and bearing.

Preload Tuning

If necessary fine tune as follows.

- 1) Install wheel into dropouts and normally lock skewer.
- 2) If you feel play at the rim turn in Micro-Tuner (clockwise). Use a 30mm wrench, very delicate torque and manners.
- 3) Unscrew Micro-Tuner for ca 1/4 of turn to release excessive preload on bearing balls and achieve max rolling smoothness.
- 4) Repeat Preload Checking and eventually slightly correct it.
- 5) The optimal bearing preload cancels play at the rim without affecting rolling smoothness.

Warning Incorrect bearing preload can damage bearings and freewheel parts additionally decreases hub performance.

Wheelbuilder's manual


WARNING: HyperWiz must be laced by a professional wheel builder only.

Be careful during lacing to equilibrate each flange tension. Every additional torsional stress will be transferred to the delicate central carbon tube. The breakage of this part during lacing will not be covered from warranty.

SPOKE TENSION:

Never exceed maximum hub spoke tension: 120Kgf

Reduce tension if the rim manufacturer recommends a lower value.

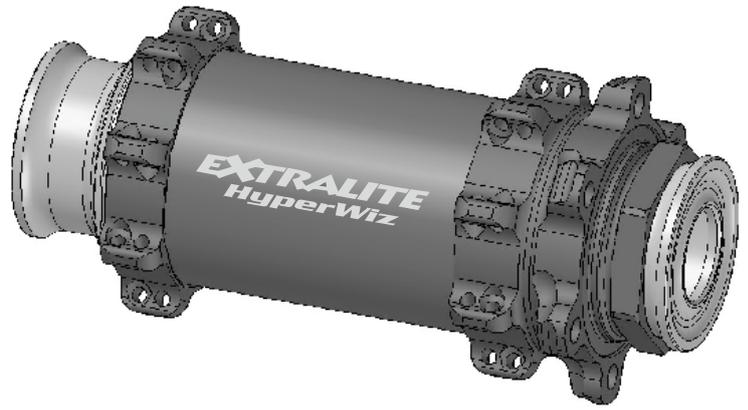

DIMENSION FOR WHEEL BUILDING

Spoke hole Ø: 2.5mm

Flange drilling Ø: 43mm


Center to right flange: 34.5mm

Center to disc flange: 28mm


See www.extralite.com to find pre-calculated spoke lengths.

Respect specific lace-pattern


24H



28H



32H



Extralite Limited Warranty

Extralite products are warranted against defects in materials and/or workmanship for a period of two years from original date of purchase to the original owner only.

Any Extralite product that is returned and found by Studio Riva to be defective in materials and/or workmanship will be repaired or replaced at the sole discretion of Studio Riva. This warranty is the sole and exclusive remedy. Studio Riva shall not be held liable for any indirect, special or consequential damages. The warranty is expressly limited to repair or replacement of the product that has been returned and found to be defective by Studio Riva and are the sole remedy of the warranty. No credits or refunds will be issued.

The warranty does not cover: normal wear, tear and fatigue; damage or failure due to accident or collision. Improper assembling, poor maintenance, alterations or modifications, installation of parts not compatible with Extralite products void this warranty. Warranty does not cover damage arising from crash, abuse and/or misuse or any other circumstances in which the product had been subjected to forces or loads beyond its design. Immediately replace the component after crash and violent shock, or after continuous heavy use. Improper use, modification and/or part changing, including surface finishing, could irreparably damage the component. All labor charges for warranty service are responsibility of the product owner.

INSTALLATION WARNING: Extralite components are extremely performing and lightweight, crafted with very high quality, they request adequate installation and maintenance care. We strongly recommended that a professional bike shop install and service your Extralite components. Improper assembly and/or adjustment may significantly compromise strength and durability of the component causing serious personal injury. Carefully check proper tightening torque of every bolt. Always respect installation recommendations.

Extralite components are designed for a specific use X-Country or Road or Downhill, respect product specific destination.

Note: the rider assumes all the risks regarding use and installation of Extralite components.